

# TECHNICAL DATA SHEET

## CABLE/ PIPE DRILL CLIPS

# tillex®





**Plastmaterial:** High impact elastic polypropylene - halogen free and UV-stabilized.  
**Screw:** Strong self drilling screw, **Corrosion Class C4**. Can be installed both indoors and outdoors.



### INSTALLATION

- Strong self drilling screw 4.8x40mm with drill shaped tip allows it to mount directly in sheet metal - max. 2.0mm, without having to drill a pilot hole.
- Recommended speed: 1500-2500 rpm.
- PH2 or T20 screw types.

### DIMENSIONS

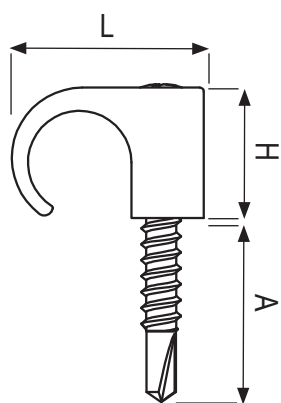

### PRODUCT RANGE (BOXES)



Ref. nr.	Type	Screw T20	Colour	Dim.L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box
160095	DC C4 14-18 W	4,8x40	white	23,7	14,00	16,5	22,3	100
160101	DC C4 14-18 G	4,8x40	grey	23,7	14,00	16,5	22,3	100
160125	DC C4 18-22 W	4,8x40	white	27,6	14,3	21,1	18,3	50
160132	DC C4 18-22 G	4,8x40	grey	27,6	14,3	21,1	18,3	50



Ref. nr.	Type	Screw PH2	Colour	Dim.L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box
150096	DC C4 14-18 W	4,8x40	white	23,7	14,00	16,5	22,3	100
150102	DC C4 14-18 G	4,8x40	grey	23,7	14,00	16,5	22,3	100
150126	DC C4 18-22 W	4,8x40	white	27,6	14,3	21,1	18,3	50
150133	DC C4 18-22 G	4,8x40	grey	27,6	14,3	21,1	18,3	50